




INVESTOR IN PEOPLE

The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ

GB04/47 36

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.



In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

Signed

Dated

18 November 2004

**PRIORITY  
 DOCUMENT**  
 SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH RULE 17.1(a) OR (b)



11 NOV 03 E851051-1 000335  
P01/7700 0.00-0326199.7

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

10 NOV 2003

The Patent Office

Cardiff Road  
Newport  
Gwent NP10 8QQ.

1. Your reference NMM/P470034GB
2. Patent application number  
(The Patent Office will fill in this part) 0326199.7
3. Full name, address and postcode of the or of each applicant (underline all surnames)  
  
Patents ADP number (if you know it)  
  
If the applicant is a corporate body, give the country/state of its incorporation  
Torotrak (Development) Ltd.,  
1 Aston Way,  
Leyland,  
Lancashire,  
PR26 7UX.  
08311284002  
ENGLAND.
4. Title of the invention CONTINUOUSLY VARIABLE RATIO TRANSMISSION
5. Name of your agent (if you have one) W.P. THOMPSON & CO.  
  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
Coopers Building,  
Church Street,  
Liverpool,  
L1 3AB.
- Patents ADP number (if you know it) 0000158001 ✓
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number.  

| Country | Priority application number (if you know it) | Date of filing (Day/month/year) |
|---------|--|---------------------------------|
|---------|--|---------------------------------|
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application  

| Number of earlier application | Date of filing (Day/month/year) |
|-------------------------------|---------------------------------|
|-------------------------------|---------------------------------|
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d)) YES

Patents Form 1/77

9. Enter then number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 6 /

Claims(s) 3 /

Abstract 1 /

Drawing(s) 2 + 2 8 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1 /

Request for substantive examination (*Patents Form 10/77*)

Any other documents (*Please specify*)

11. I/We request the grant of a patent on the basis of this application

Signature

Date 10/11/2003

*[Handwritten signature]*

12. Name and daytime telephone number of person to contact in the United Kingdom N.M.MANLEY.  
0151-709-3961.

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

In one embodiment a third clutch is disposed between said other driven rotatable member and the final drive shaft for selectively connecting the said other driven rotatable member to the final drive shaft via the third epicyclic.

The second and third clutches are preferably disposed respectively  
5 between the said one driven rotatable member and the third epicyclic and between the said other driven rotatable member and the third epicyclic.

In another embodiment, a fourth epicyclic is disposed between said other driven rotatable member and the final drive shaft and receiving inputs from the output of the first epicyclic and said other driven rotatable shaft and  
10 a third clutch is disposed between said other driven rotatable member and the final drive shaft for selectively connecting the said other driven rotatable member to the final drive shaft via the fourth epicyclic.

The second and third clutches are preferably disposed respectively between the third epicyclic and the final drive shaft and the fourth epicyclic and  
15 the final drive shaft.

By way of example only, specific embodiments of the present invention will now be described, with reference to the accompanying drawings, in which :-

Fig. 1 is a diagrammatic representation of a first embodiment of CVT in accordance with the present invention;

20 Fig. 2 is a representation of the transmission of Fig. 1, which illustrates the transmission gearing in more detail;

Fig. 3 is a graph illustrating the operation of the first embodiment: and

Fig. 4 is a diagrammatic representation of a second embodiment of CVT in accordance with the present invention.

Referring to Figs. 1 and 2, a CVT has an input shaft 10, connected to a prime mover via reduction gearing 12, an output shaft 14, a variator V of the toroidal-race rolling traction type, an input epicyclic 16, a recirculating epicyclic 18 and a mixing epicyclic 20. Reference numerals 24,26 indicate shafts connected to opposite sides of the variator V, which are connected via reduction gearing 28,30 to rotating members (hereinafter referred to as "shafts", for convenience) 32,34 which are in turn connected to two components (the annulus A1 and the sun gear S1 respectively) of the input epicyclic 16, the remaining component (the planet carrier C1) being connected to the input shaft 10.

The shafts 32,34 are also connected to two components (the annulus A2 and the sun gear S2) of the recirculating epicyclic 18, the third component (the planet carrier C2) being connected by engagement of a low regime clutch L and via reduction gearing 38 to the output shaft 14.

In addition, the shafts 32,34 are selectively and alternatively connectible via respective reduction gearing 40,42 and respective high regime forward and reverse clutches F,R to the same component (the planet carrier C3) of the mixing epicyclic 20, another component (the annulus A3) of the epicyclic being permanently connected to the output (the planet carrier C2) of the recirculating epicyclic 18.

In low regime, the low regime clutch L is engaged and the high regime forward and reverse clutches F,R are disengaged. In low regime, power recirculates through the epicyclic 18 and, as shown in Fig. 3 by the line "Output L engaged",

as the variator V progresses from one end of its ratio range to the other the speed of the output shaft 14 can be arranged to make a continuous "low regime" progression from a finite maximum value in one direction, falling to zero and then climbing to a second maximum value in the opposite direction. In this way, the transmission can shuttle easily between reverse and forward without having to change regime. This is important for off-highway vehicles such as tractors and the like in which the transmission transmits high levels of torque at low vehicle speeds, during which it is preferable to avoid regime changes if possible.

It will also be seen from Fig. 3 that for each of a particular forward and reverse speed of the output shaft 14 there is a variator ratio (approximately -0.68 and -2.74, corresponding to an output shaft speed of about 4,000 rpm) at which the output from the mixing epicyclic 20, if it were to be connected by the respective high regime forward or reverse clutch F,R, would be identical to the output from the mixing epicyclic 18 on engagement of the low regime clutch L, i.e. the two inputs to the mixing epicyclic 20 would be identical. This is known as "synchronous ratio" and at that ratio the forward or reverse clutch F,R can be engaged, depending on the direction of rotation of the output shaft 14, and the low regime clutch L can be disengaged in order to place the transmission in a high forward or high reverse regime as appropriate.

In high forward or high reverse regime, as illustrated in Fig. 3, the variator ratio is adjusted in the opposite direction as compared with low regime operation in order to increase the speed of the output shaft 14. In these regimes, the drive of one of the shafts 32, 34 is connected to the output shaft 14 via the engaged clutch

F or R, the mixing epicyclic 20 (through the output component, sun gear S3) and reduction gearing 46.

A second embodiment is illustrated in Fig. 4. This is very similar to the first embodiment and the same reference numerals are used to describe corresponding features. The main difference is that the single mixing epicyclic 20 of the first embodiment is replaced with two mixing epicyclics 20', 20'', a component (the planet carrier) of each of which is connected to a respective one of the two shafts 32,34, a further component (the sun gear) of each of the epicyclics 20', 20'' being selectively and alternatively connectible to the output shaft 14 via forward and reverse high regime clutches F,R respectively. In a similar manner to the first embodiment, the output of the recirculating epicyclic 18 is connected to a component (the annulus) of each of the forward and reverse mixing epicyclics 20', 20'' and is also connectible via a low regime clutch L to the output shaft 14. When high forward or high reverse regime is required at synchronous ratio, the appropriate forward or reverse clutch F,R is engaged and the low regime clutch L is disengaged to connect the output of the appropriate mixing epicyclic 20', 20'' to the output shaft 14 via the reduction gearing.

The invention is not restricted to the details of the foregoing embodiments.

## CLAIMS

1. A continuously variable ratio transmission (CVT) comprising:
- (a) a ratio varying unit ("variator");
  - 5 (b) a first epicyclic having two inputs connected to opposite sides of the variator;
  - (c) a second epicyclic having an input driven by a prime mover and components connected to opposite sides of the variator;
  - (d) a final drive shaft;
  - 10 (e) a low regime clutch for selectively connecting the output of the first epicyclic to the final drive shaft in low regime;
  - (f) a third, mixing, epicyclic connected to the output of the first epicyclic and connected or connectable to the variator and being connectible with the final drive shaft in high regime by way of a high regime clutch;
  - 15 wherein the high and low regimes are coincident at at least one variator ratio and the variator operates in opposite directions in the low and high regimes.
2. A continuously variable ratio transmission (CVT) as claimed in claim 1, wherein the operation ranges of the high and low regimes overlap.
- 20
3. A continuously variable ratio transmission (CVT) comprising:
- (a) a ratio varying unit ("variator");



(b) a first epicyclic having two inputs connected to opposite sides of the variator:

(c) a second epicyclic having an input driven by a prime mover and components connected to opposite sides of the variator:

5 (d) a final drive shaft connectible with the variator by way of one of two alternative driven rotatable members connected to opposite sides of the variator respectively; and

a first clutch disposed between an output of the first epicyclic and the final drive shaft for selectively connecting the output of the first epicyclic to the final drive

10 shaft:

the transmission further comprising:

a third, mixing, epicyclic disposed between at least one of the driven rotatable members and the final drive shaft and receiving inputs from the output of the first epicyclic and said driven rotatable shaft; and

15 a second clutch disposed between said one driven rotatable member and the final drive shaft for selectively connecting the said one driven rotatable member to the final drive shaft via the third epicyclic.

4. A CVT as claimed in claim 3, further comprising a third clutch disposed  
20 between said other driven rotatable member and the final drive shaft for selectively connecting the said other driven rotatable member to the final drive shaft via the third epicyclic.

5. A CVT as claimed in claim 4, wherein the second and third clutches are disposed respectively between the said one driven rotatable member and the third epicyclic and between the said other driven rotatable member and the third epicyclic.

5

6. A CVT as claimed in claim 3, further comprising:

a fourth epicyclic disposed between said other driven rotatable member and the final drive shaft and receiving inputs from the output of the first epicyclic and said other driven rotatable shaft; and

10 a third clutch disposed between said other driven rotatable member and the final drive shaft for selectively connecting the said other driven rotatable member to the final drive shaft via the fourth epicyclic.

7. A CVT as claimed in claim 6, wherein the second and third clutches are  
15 disposed respectively between the third epicyclic and the final drive shaft and the fourth epicyclic and the final drive shaft.

## ABSTRACT

A continuously variable ratio transmission (CVT) comprises a ratio  
varying unit ("variator"), a first epicyclic having two inputs connected to opposite  
5 sides of the variator, a second epicyclic having an input driven by a prime mover  
and components connected to opposite sides of the variator, a final drive shaft, a  
low regime clutch for selectively connecting the output of the first epicyclic to the  
final drive shaft in low regime and a third, mixing, epicyclic connected to the  
output of the first epicyclic and connected or connectable to the variator and being  
10 connectible with the final drive shaft in high regime by way of a high regime  
clutch. The high and low regimes are coincident at at least one variator ratio (or,  
more preferably, the operation ranges overlap) and the variator operates in  
opposite directions in the low and high regimes.

(Fig.1)

15

G:\Client\470-475\TS9470034\GB\master.DOC

1/2

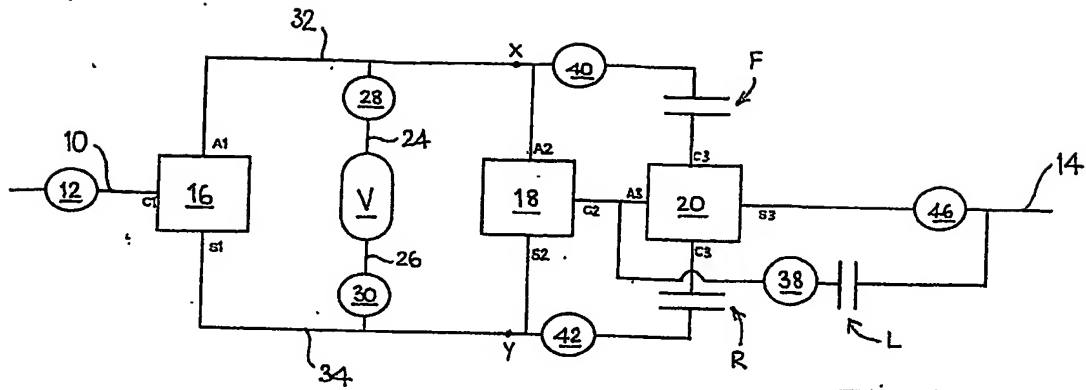


Fig. 1

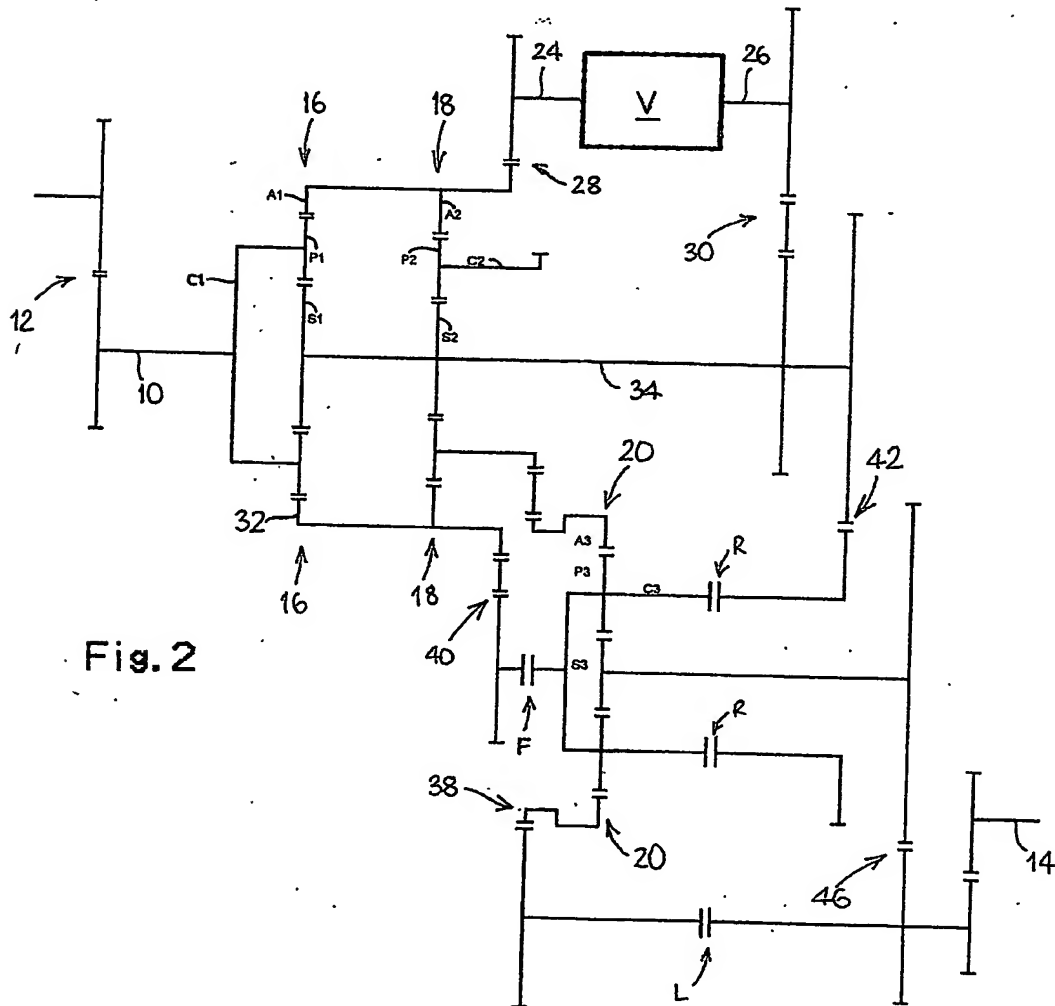


Fig. 2

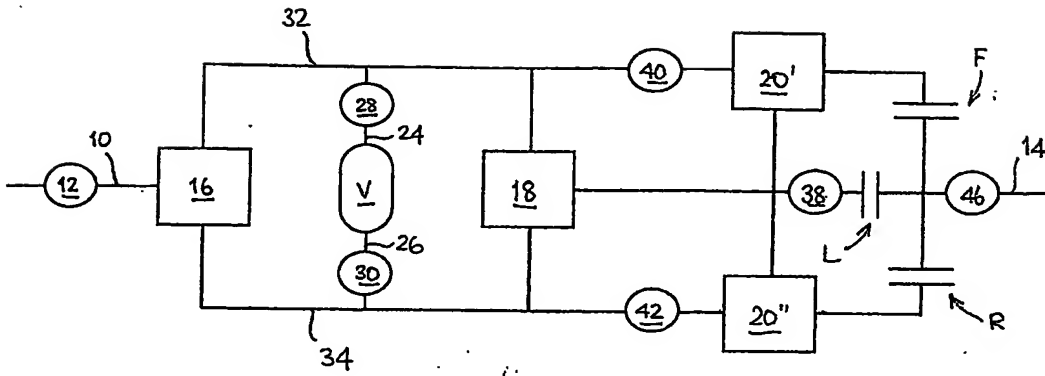


Fig. 4

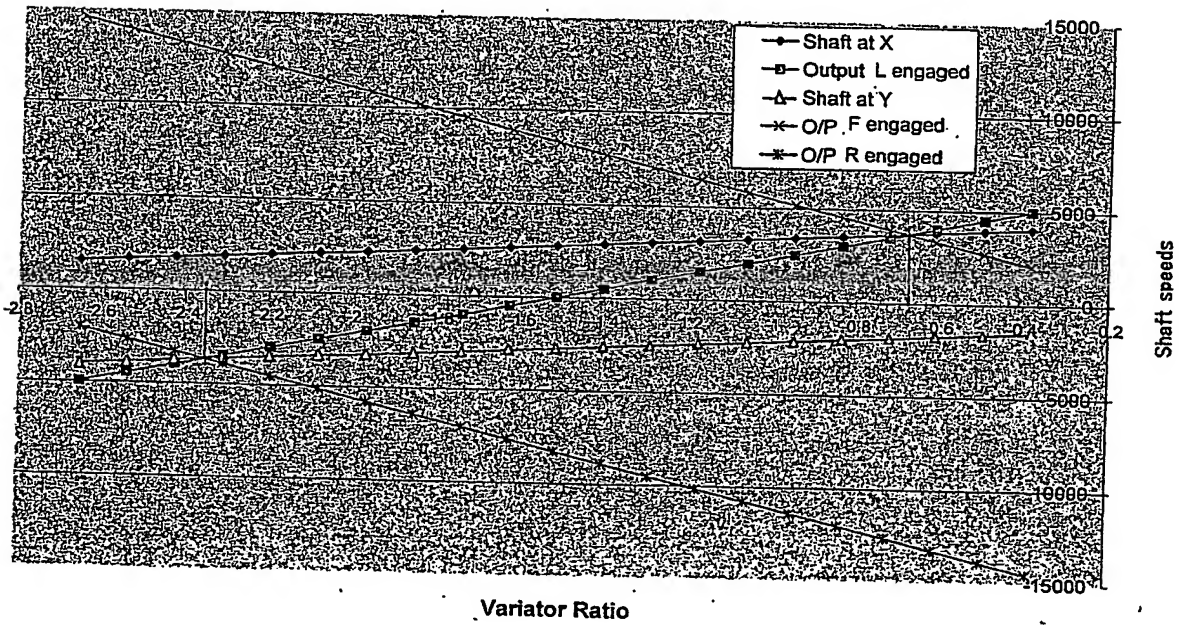


Fig. 3

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**